



RLTT series LED Street light series. Slim housing, high performance output. Designed for commercial and general area illumination.

- Powder coated aluminium housing
- High quality optical grade polycarbonate spread lens
- Philips High performance LED chips
- Meanwell integral electronic LED driver

**Colour Temperature:** 3000K / 4000K / 5000K

**LEDs Life Time:** 50,000Hrs L70 / B10

**CRI:** CRI70+

**Beam Angle:** Type III  
Type IV  
Type V

**Driver options:** Non-dimmable or DALI dimmable

**IP Rating:** IP66

**IK Rating:** IK10

**Mounting:** Adjustable spigot mounting or Wall mounting bracket

**Available Colour:** Black finish. Other colour is available on request.

**Applications:**

Suitable for industrial and residential areas.

Car parks, Parking lots, Minor roads, Platforms, Footpaths, Public amenity, Security & Driveways.

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.

## Rytec Lighting Australia Pty Ltd

Cat	Watt	Colour Temperature	Lumen Output	Beam	Size L x W x H	IP
RLTT-75	75W	4000K	12443 12518 12844	Type III Type IV Type V	585 x 270 x 56	IP66
RLTT-115	115W	4000K	18369 19318 18545	Type III Type IV Type V	585 x 270 x 56	IP66
RLTT-145	145W	4000K	22358 23294 22645	Type III Type IV Type V	585 x 270 x 56	IP66
RLTT-180	180W	4000K	30279 30647 31142	Type III Type IV Type V	679 x 350 x 56	IP66
RLTT-200	200W	4000K	32441 32620 33572	Type III Type IV Type V	679 x 350 x 56	IP66
RLTT-230	230W	4000K	36748 36851 36054	Type III Type IV Type V	679 x 350 x 56	IP66
RLTT-300	300W	4000K	43998 44968 44459	Type III Type IV Type V	750 x 360 x 75	IP66
RLTT-420	420W	4000K	60028 60243 60912	Type III Type IV Type V	750 x 360 x 75	IP66

### Optional Extras


**Specify as: RLTT180 - (A or D) - (III or IV or V) - (PE) - (EBD)**

Options	Suffix	Comments
Spigot mounting bracket	A	Adjustable spigot mounting bracket to suit 60mm O.D. spigot
Wall mounting bracket	D	Adjustable wall mounting bracket
Type III Beam angle	III	
Type IV Beam angle	IV	
Type V Beam angle	V	
PE Cell	PE	Photoelectric cell
DALI Dimmable	EBD	Integral DALI Dimmable driver


Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.


**RLTT-75 75W 4000K Type III**

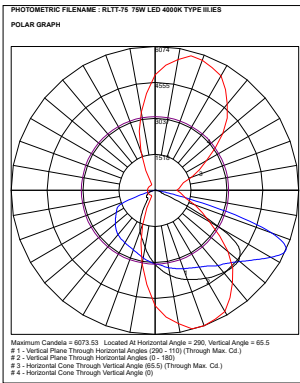


**RLTT-75 75W 4000K Type IV**

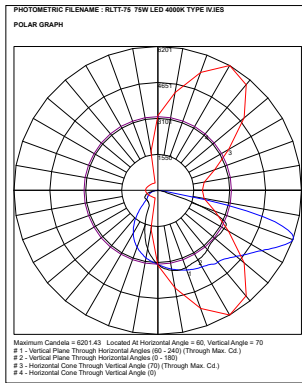


**RLTT-75 75W 4000K Type V**

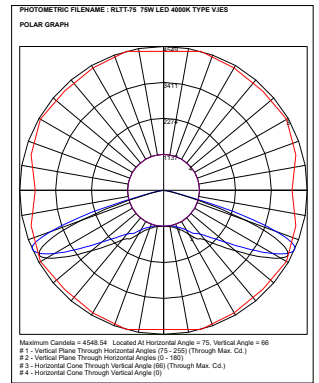


**RLTT-145 145W 4000K Type III**

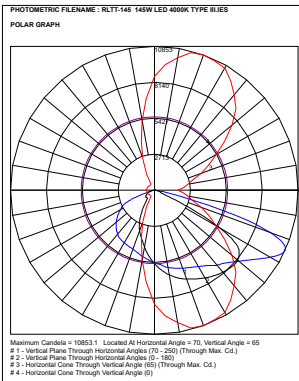


**RLTT-145 145W 4000K Type IV**

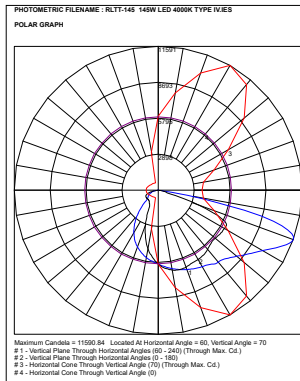


**RLTT-145 145W 4000K Type V**

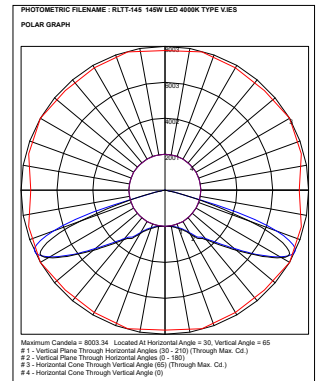


**RLTT-200 200W 4000K Type III**

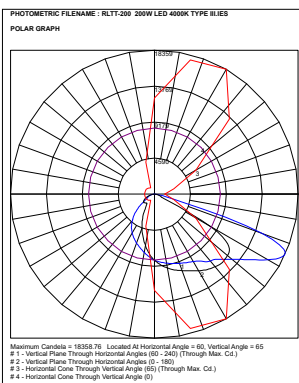

**RLTT-200 200W 4000K Type IV**

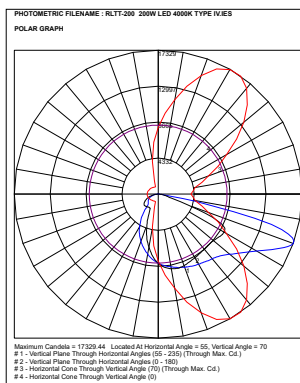

**RLTT-200 200W 4000K Type V**

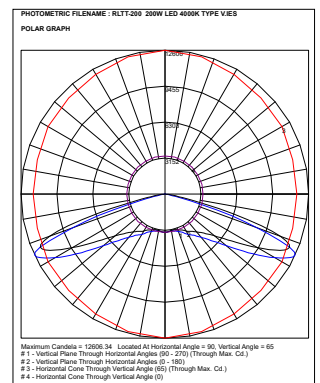

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.